


ITEM	PART NAME	MATERIAL	QTY
1	BODY	316L SST	1
2	SEAT	KEL-F	1
3	LOWER STEM	MONEL	1
4	UPPER STEM	MONEL	1
5	BONNET PACKING	TEFLON	1
6	BONNET NUT	316L SST	1
7	STEM PACKING RING	VIRGIN PTFE	1
8	STEM SEAL FOLLOWER	316L SST	1
9	SPRING, BELLEVILLE	STAINLESS STEEL	4
10	STEM PACKING COLLAR	316L SST	1
11	DUST GUARD SEAL	VIRGIN PTFE	1
12	NUT, 1/4-20	SST	1
13	LABEL	VINYL/MYLAR	1
14	HANDLE	ABS	1

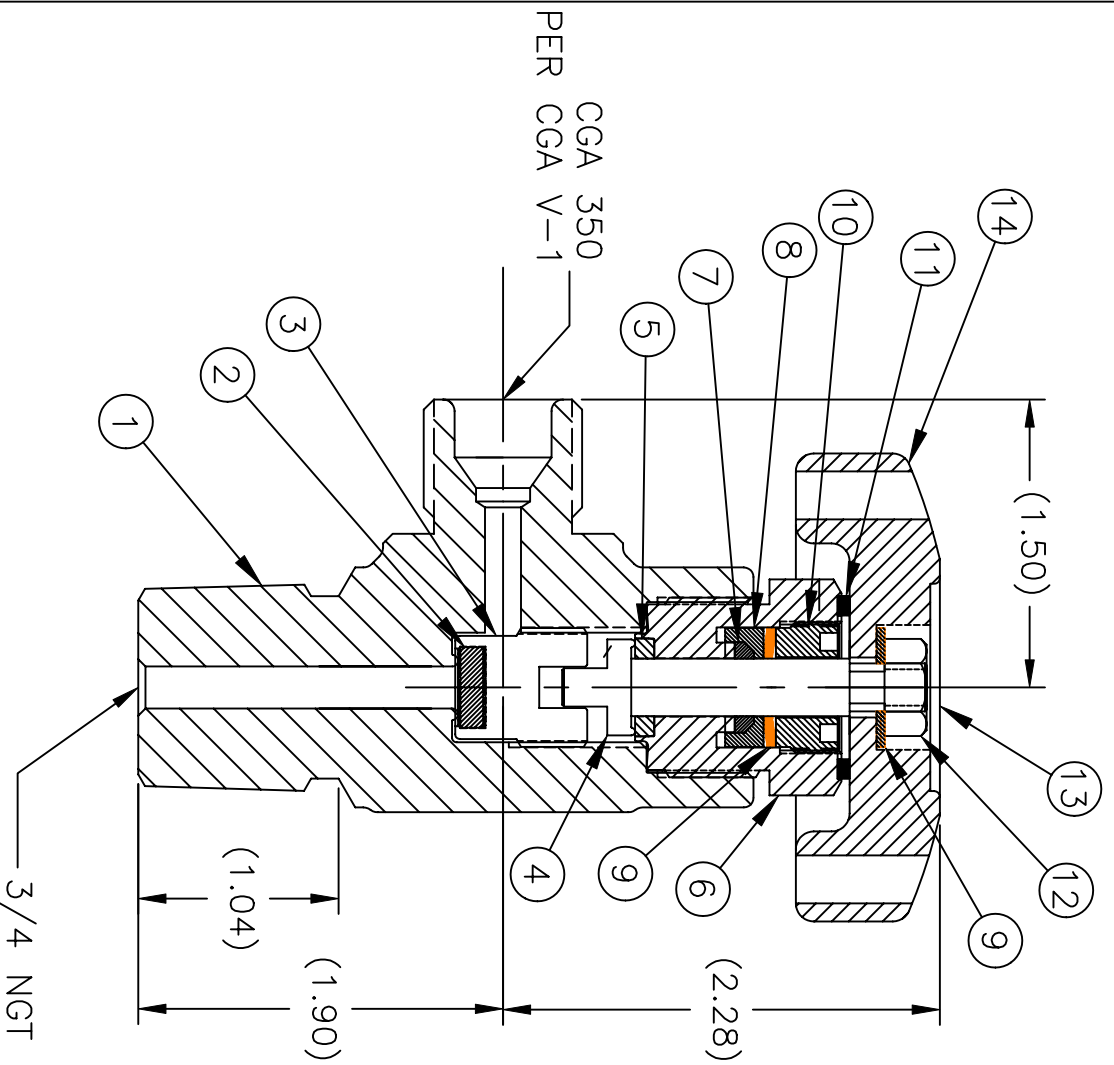

- NOTES:
1. DIMENSIONS ARE IN INCHES.
  2. CLEAN AND PACKAGE FOR OXYGEN SERVICE.

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES. THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT.

TOLERANCES UNLESS OTHERWISE NOTED	
X = ±.50	ANGLES ± 1 DEG
.X = ±.050	FRACTIONS ± 1/64
.XX = ±.010	CONCENTRICITY T.I.R. = .005
.XXX = ±.005	SURFACE FINISH = 63 Ra
MAT'L: SEE BOM	
DWN:  FAS	SCALE: 1:1
SHEET: 1 of 1	DATE: 3/20/2012

SPECIFICATIONS:  
 PRESSURE RATING: 3500 PSI  
 SEAT ORIFICE SIZE: .219  $\phi$   
 SEAT MATERIAL: KEL-F  
 TEMPERATURE LIMITS: -65° F TO 150° F  
 LEAK RATE: LESS THAN 1 x 10<sup>-3</sup> ATM CC/SEC N2

UNCONTROLLED  
 For Reference Only  
 FAS 3/20/2012

*GasFlo Products Inc.*  
*Fairfield, N.J.*

SALES DWG, PRESSURE SEAL VALVE  
 3/4" NGT x CGA 350

DWG: SALES-VLV-PSA-12350SS-MM