


UNCONTROLLED
FOR REFERENCE
ONLY
MB 12/6/2010

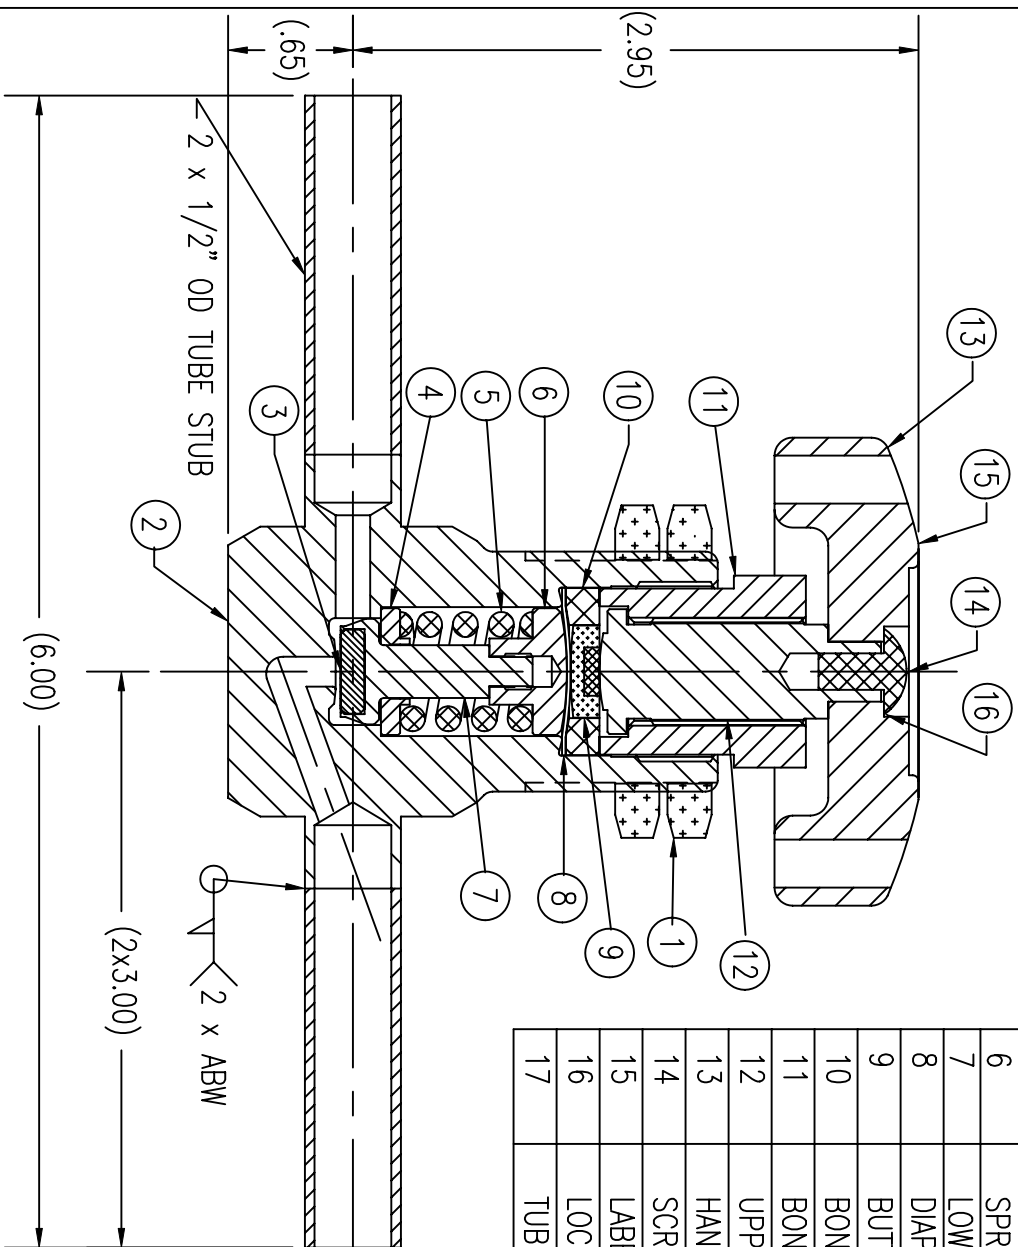

ITEM	PART NAME	MATERIAL	QTY
1	PANEL NUT	303 SST	2
2	BODY	316L SST	1
3	SEAT	PCTFE	1
4	SPRING SUPPORT	316L SST	1
5	SPRING	316L SST	1
6	SPRING RETAINER	316L SST	1
7	LOWER STEM	316L SST	1
8	DIAPHRAGM	ELGLOY	4
9	BUTTON ASSY.	316L/PFRP	1
10	BONNET	316L SST	1
11	BONNET NUT	302 SST	1
12	UPPER STEM	416 SST	1
13	HANDLE	ALUMINUM	1
14	SCREW	18-8 SST	1
15	LABEL	VINYL/MYLAR	1
16	LOCKWASHER	SST	1
17	TUBE EXTENSION	316L TUBE; 10 Rd EP	2

SPECIFICATIONS:
 PRESSURE RATING: 0 PSIA TO 3000 PSIG @ 70°F
 MAX. DIFFERENTIAL BACK PRESSURE: 3000 PSID
 FLOW COEFFICIENT Cv = .30
 SEAT ORIFICE SIZE: .156 ϕ
 LEAK RATE: BELOW 2 x 10-8 CC/SEC-ATM He
 WETTED SURFACE FINISH: 15 Rd EP BODY
 MOUNTS IN PANEL UP TO 5/16 THICK WITH
 1 1/4 TO 1 7/16 ϕ HOLE

GasFlo Products Inc.
 Fairfield, N.J.

SALES DWG. - 1/2 TUBE STUB x 1/2 TUBE STUB SST
 SPRING TYPE DIAPHRAGM VALVE W/ 3" TUBE EXTENSIONS

THIS DOCUMENT CONTAINS INFORMATION THAT IS THE PROPRIETARY AND CONFIDENTIAL PROPERTY
 OF GASFLO PRODUCTS INC. AND MAY BE USED ONLY FOR AUTHORIZED PURPOSES.
 THIS DOCUMENT MAY NOT BE REPRODUCED WITHOUT GASFLO PRODUCTS INC. PRIOR WRITTEN CONSENT

DWN: MB
 APPVD:
 SCALE: NTS
 DATE: 12/6/10

DWG: SALES-VLV-ST-88SS-TSTS-3